

## CHAPTER 1

1.1 You are given the following differential equation with the initial condition,  $v(t=0) = 0$ ,

$$\frac{dv}{dt} = g - \frac{c_d}{m} v^2$$

Multiply both sides by  $m/c_d$

$$\frac{m}{c_d} \frac{dv}{dt} = \frac{m}{c_d} g - v^2$$

Define  $a = \sqrt{mg/c_d}$

$$\frac{m}{c_d} \frac{dv}{dt} = a^2 - v^2$$

Integrate by separation of variables,

$$\int \frac{dv}{a^2 - v^2} = \int \frac{c_d}{m} dt$$

A table of integrals can be consulted to find that

$$\int \frac{dx}{a^2 - x^2} = \frac{1}{a} \tanh^{-1} \frac{x}{a}$$

Therefore, the integration yields

$$\frac{1}{a} \tanh^{-1} \frac{v}{a} = \frac{c_d}{m} t + C$$

If  $v = 0$  at  $t = 0$ , then because  $\tanh^{-1}(0) = 0$ , the constant of integration  $C = 0$  and the solution is

$$\frac{1}{a} \tanh^{-1} \frac{v}{a} = \frac{c_d}{m} t$$

This result can then be rearranged to yield

$$v = \sqrt{\frac{gm}{c_d}} \tanh\left(\sqrt{\frac{gc_d}{m}} t\right)$$

**1.2 (a)** For the case where the initial velocity is positive (downward), Eq. (1.21) is

$$\frac{dv}{dt} = g - \frac{c_d}{m} v^2$$

Multiply both sides by  $m/c_d$

$$\frac{m}{c_d} \frac{dv}{dt} = \frac{m}{c_d} g - v^2$$

Define  $a = \sqrt{mg/c_d}$

$$\frac{m}{c_d} \frac{dv}{dt} = a^2 - v^2$$

Integrate by separation of variables,

$$\int \frac{dv}{a^2 - v^2} = \int \frac{c_d}{m} dt$$

A table of integrals can be consulted to find that

$$\int \frac{dx}{a^2 - x^2} = \frac{1}{a} \tanh^{-1} \frac{x}{a}$$

Therefore, the integration yields

$$\frac{1}{a} \tanh^{-1} \frac{v}{a} = \frac{c_d}{m} t + C$$

If  $v = +v_0$  at  $t = 0$ , then

$$C = \frac{1}{a} \tanh^{-1} \frac{v_0}{a}$$

Substitute back into the solution

$$\frac{1}{a} \tanh^{-1} \frac{v}{a} = \frac{c_d}{m} t + \frac{1}{a} \tanh^{-1} \frac{v_0}{a}$$

Multiply both sides by  $a$ , taking the hyperbolic tangent of each side and substituting  $a$  gives,

$$v = \sqrt{\frac{mg}{c_d}} \tanh \left( \sqrt{\frac{gc_d}{m}} t + \tanh^{-1} \sqrt{\frac{c_d}{mg}} v_0 \right) \quad (1)$$

(b) For the case where the initial velocity is negative (upward), Eq. (1.21) is

$$\frac{dv}{dt} = g + \frac{c_d}{m} v^2$$

Multiplying both sides of Eq. (1.8) by  $m/c_d$  and defining  $a = \sqrt{mg/c_d}$  yields

$$\frac{m}{c_d} \frac{dv}{dt} = a^2 + v^2$$

Integrate by separation of variables,

$$\int \frac{dv}{a^2 + v^2} = \int \frac{c_d}{m} dt$$

A table of integrals can be consulted to find that

$$\int \frac{dx}{a^2 + x^2} = \frac{1}{a} \tan^{-1} \frac{x}{a}$$

Therefore, the integration yields

$$\frac{1}{a} \tan^{-1} \frac{v}{a} = \frac{c_d}{m} t + C$$

The initial condition,  $v(0) = v_0$  gives

$$C = \frac{1}{a} \tan^{-1} \frac{v_0}{a}$$

Substituting this result back into the solution yields

$$\frac{1}{a} \tan^{-1} \frac{v}{a} = \frac{c_d}{m} t + \frac{1}{a} \tan^{-1} \frac{v_0}{a}$$

Multiplying both sides by  $a$  and taking the tangent gives

$$v = a \tan \left( a \frac{c_d}{m} t + \tan^{-1} \frac{v_0}{a} \right)$$

or substituting the values for  $a$  and simplifying gives

$$v = \sqrt{\frac{mg}{c_d}} \tan \left( \sqrt{\frac{gc_d}{m}} t + \tan^{-1} \sqrt{\frac{c_d}{mg}} v_0 \right) \quad (2)$$

(c) We use Eq. (2) until the velocity reaches zero. Inspection of Eq. (2) indicates that this occurs when the argument of the tangent is zero. That is, when

$$\sqrt{\frac{gc_d}{m}} t_{zero} + \tan^{-1} \sqrt{\frac{c_d}{mg}} v_0 = 0$$

The time of zero velocity can then be computed as

$$t_{zero} = -\sqrt{\frac{m}{gc_d}} \tan^{-1} \sqrt{\frac{c_d}{mg}} v_0$$

Thereafter, the velocities can then be computed with Eq. (1.9),

$$v = \sqrt{\frac{mg}{c_d}} \tanh \left( \sqrt{\frac{gc_d}{m}} (t - t_{zero}) \right) \quad (3)$$

Here are the results for the parameters from Example 1.2, with an initial velocity of  $-40$  m/s.

$$t_{zero} = -\sqrt{\frac{68.1}{9.81(0.25)}} \tan^{-1} \left( \sqrt{\frac{0.25}{68.1(9.81)}} (-40) \right) = 3.470239 \text{ s}$$

Therefore, for  $t = 2$ , we can use Eq. (2) to compute


$$v = \sqrt{\frac{68.1(9.81)}{0.25}} \tan \left( \sqrt{\frac{9.81(0.25)}{68.1}}(2) + \tan^{-1} \sqrt{\frac{0.25}{68.1(9.81)}}(-40) \right) = -14.8093 \frac{\text{m}}{\text{s}}$$

For  $t = 4$ , the jumper is now heading downward and Eq. (3) applies

$$v = \sqrt{\frac{68.1(9.81)}{0.25}} \tanh \left( \sqrt{\frac{9.81(0.25)}{68.1}}(4 - 3.470239) \right) = 5.17952 \frac{\text{m}}{\text{s}}$$

The same equation is then used to compute the remaining values. The results for the entire calculation are summarized in the following table and plot:

$t$ (s)	$v$ (m/s)
0	-40
2	-14.8093
3.470239	0
4	5.17952
6	23.07118
8	35.98203
10	43.69242
12	47.78758

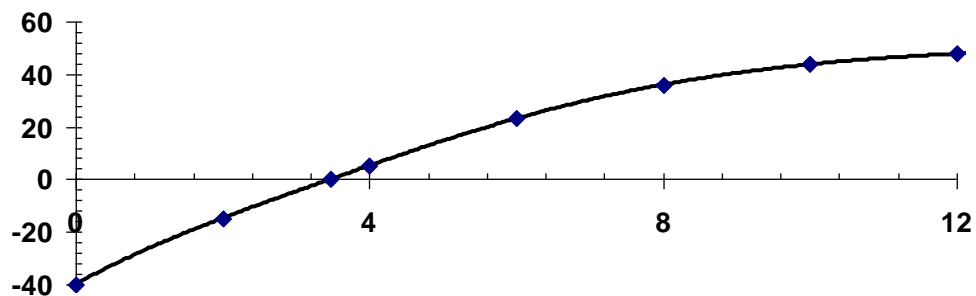

**1.3 (a)** This is a transient computation. For the period ending June 1:

$$\text{Balance} = \text{Previous Balance} + \text{Deposits} - \text{Withdrawals} + \text{Interest}$$

$$\text{Balance} = 1512.33 + 220.13 - 327.26 + 0.01(1512.33) = 1420.32$$

The balances for the remainder of the periods can be computed in a similar fashion as tabulated below:

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Date	Deposit	Withdrawal	Interest	Balance
1-May				\$1,512.33
	\$220.13	\$327.26	\$15.12	
1-Jun				\$1,420.32
	\$216.80	\$378.61	\$14.20	
1-Jul				\$1,272.72
	\$450.25	\$106.80	\$12.73	
1-Aug				\$1,628.89
	\$127.31	\$350.61	\$16.29	
1-Sep				<b>\$1,421.88</b>

(b)  $\frac{dB}{dt} = D(t) - W(t) + iB$

(c) for  $t = 0$  to  $0.5$ :

$$\frac{dB}{dt} = 220.13 - 327.26 + 0.01(1512.33) = -92.01$$

$$B(0.5) = 1512.33 - 92.01(0.5) = 1466.33$$

for  $t = 0.5$  to  $1$ :


$$\frac{dB}{dt} = 220.13 - 327.260 + 0.01(1466.33) = -92.47$$

$$B(0.5) = 1466.33 - 92.47(0.5) = 1420.09$$

The balances for the remainder of the periods can be computed in a similar fashion as tabulated below:

Date	Deposit	Withdrawal	Interest	$dB/dt$	Balance
1-May	\$220.13	\$327.26	\$15.12	-\$92.01	\$1,512.33
16-May	\$220.13	\$327.26	\$14.66	-\$92.47	\$1,466.33
1-Jun	\$216.80	\$378.61	\$14.20	-\$147.61	\$1,420.09
16-Jun	\$216.80	\$378.61	\$13.46	-\$148.35	\$1,346.29
1-Jul	\$450.25	\$106.80	\$12.72	\$356.17	\$1,272.12
16-Jul	\$450.25	\$106.80	\$14.50	\$357.95	\$1,450.20
1-Aug	\$127.31	\$350.61	\$16.29	-\$207.01	\$1,629.18
16-Aug	\$127.31	\$350.61	\$15.26	-\$208.04	\$1,525.67
1-Sep					<b>\$1,421.65</b>

(d) As in the plot below, the results of the two approaches are very close.

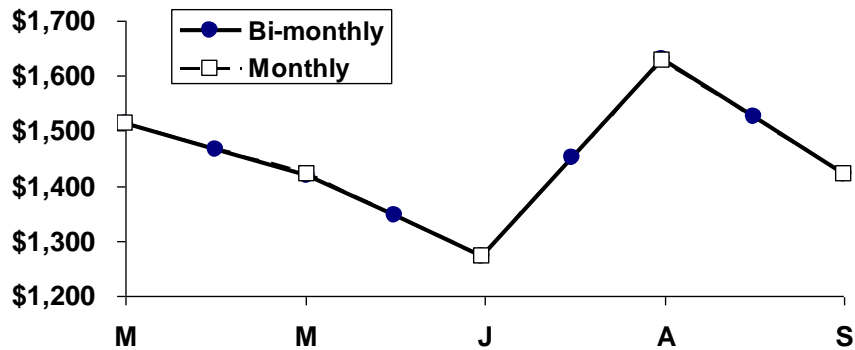


1.4 At  $t = 12$  s, the analytical solution is 50.6175 (Example 1.1). The numerical results are:

step	$v(12)$	absolute relative error
2	51.6008	1.94%
1	51.2008	1.15%
0.5	50.9259	0.61%

where the relative error is calculated with

$$\text{absolute relative error} = \left| \frac{\text{analytical} - \text{numerical}}{\text{analytical}} \right| \times 100\%$$

The error versus step size can be plotted as

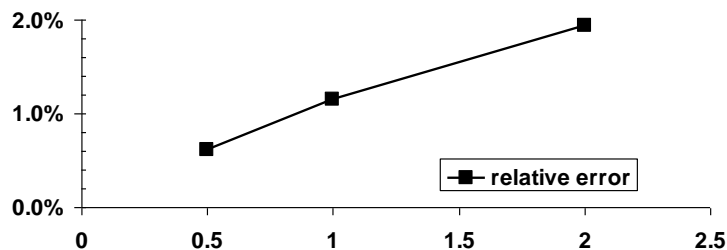

Thus, halving the step size approximately halves the error.

1.5 (a) The force balance is

$$\frac{dv}{dt} = g - \frac{c'}{m}v$$

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

Applying Laplace transforms,

$$sV - v(0) = \frac{g}{s} - \frac{c'}{m} V$$

Solve for

$$V = \frac{g}{s(s + c'/m)} + \frac{v(0)}{s + c'/m} \quad (1)$$

The first term to the right of the equal sign can be evaluated by a partial fraction expansion,

$$\frac{g}{s(s + c'/m)} = \frac{A}{s} + \frac{B}{s + c'/m} \quad (2)$$

$$\frac{g}{s(s + c'/m)} = \frac{A(s + c'/m) + Bs}{s(s + c'/m)}$$

Equating like terms in the numerators yields

$$A + B = 0$$

$$g = \frac{c'}{m} A$$

Therefore,

$$A = \frac{mg}{c'} \quad B = -\frac{mg}{c'}$$

These results can be substituted into Eq. (2), and the result can be substituted back into Eq. (1) to give

$$V = \frac{mg/c'}{s} - \frac{mg/c'}{s + c'/m} + \frac{v(0)}{s + c'/m}$$

Applying inverse Laplace transforms yields

$$v = \frac{mg}{c'} - \frac{mg}{c'} e^{-(c'/m)t} + v(0)e^{-(c'/m)t}$$

or

$$v = v(0)e^{-(c'/m)t} + \frac{mg}{c'} \left[ 1 - e^{-c'/m t} \right]$$

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.



where the first term to the right of the equal sign is the general solution and the second is the particular solution. For our case,  $v(0) = 0$ , so the final solution is

$$v = \frac{mg}{c'} [1 - e^{-(c'/m)t}]$$

**Alternative solution:** Another way to obtain solutions is to use separation of variables,

$$\int \frac{1}{g - \frac{c'}{m}v} dv = \int dt$$

The integrals can be evaluated as

$$-\frac{\ln\left(g - \frac{c'}{m}v\right)}{c'/m} = t + C$$

where  $C =$  a constant of integration, which can be evaluated by applying the initial condition

$$C = -\frac{\ln\left(g - \frac{c'}{m}v(0)\right)}{c'/m}$$

which can be substituted back into the solution

$$-\frac{\ln\left(g - \frac{c'}{m}v\right)}{c'/m} = t - \frac{\ln\left(g - \frac{c'}{m}v(0)\right)}{c'/m}$$

This result can be rearranged algebraically to solve for  $v$ ,

$$v = v(0)e^{-(c'/m)t} + \frac{mg}{c'} [1 - e^{-(c'/m)t}]$$

where the first term to the right of the equal sign is the general solution and the second is the particular solution. For our case,  $v(0) = 0$ , so the final solution is

$$v = \frac{mg}{c'} [1 - e^{-(c'/m)t}]$$


(b) The numerical solution can be implemented as

$$v(2) = 0 + \left[ 9.81 - \frac{11.5}{68.1}(0) \right] 2 = 19.62$$

$$v(4) = 19.62 + \left[ 9.81 - \frac{11.5}{68.1}(19.62) \right] 2 = 32.6136$$

The computation can be continued and the results summarized and plotted as:

$t$	$v$	$dv/dt$
0	0	9.81
2	19.6200	6.4968
4	32.6136	4.3026
6	41.2187	2.8494
8	46.9176	1.8871
10	50.6917	1.2497
12	53.1911	0.8276
$\infty$	58.0923	

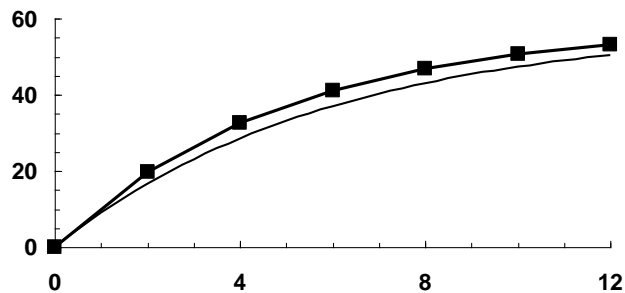

Note that the analytical solution is included on the plot for comparison.

$$1.6 \quad v(t) = \frac{gm}{c'}(1 - e^{-(c'/m)t})$$

$$\text{jumper \#1: } v(t) = \frac{9.81(70)}{12}(1 - e^{-(12/70)t}) = 44.99204 \frac{\text{m}}{\text{s}}$$

$$\text{jumper \#2: } 44.99204 = \frac{9.81(80)}{15}(1 - e^{-(15/80)t})$$

$$44.99204 = 52.32 - 52.32e^{-0.1875t}$$

$$0.14006 = e^{-0.1875t}$$

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

$$t = \frac{\ln 0.14006}{-0.1875} = 10.4836 \text{ s}$$

**1.7** Note that the differential equation should be formulated as

$$\frac{dv}{dt} = g - \frac{c_d}{m} v|v|$$

This ensures that the sign of the drag is correct when the parachutist has a negative upward velocity. Before the chute opens ( $t < 10$ ), Euler's method can be implemented as


$$v(t + \Delta t) = v(t) + \left[ 9.81 - \frac{0.25}{80} v|v| \right] \Delta t$$

After the chute opens ( $t \geq 10$ ), the drag coefficient is changed and the implementation becomes

$$v(t + \Delta t) = v(t) + \left[ 9.81 - \frac{1.5}{80} v|v| \right] \Delta t$$

Here is a summary of the results along with a plot:

Chute closed			Chute opened		
$t$	$v$	$dv/dt$	$t$	$v$	$dv/dt$
0	-20.0000	11.0600	10	51.5260	-39.9698
1	-8.9400	10.0598	11	11.5561	7.3060
2	1.1198	9.8061	12	18.8622	3.1391
3	10.9258	9.4370	13	22.0013	0.7340
4	20.3628	8.5142	14	22.7352	0.1183
5	28.8770	7.2041	15	22.8535	0.0172
6	36.0812	5.7417	16	22.8707	0.0025
7	41.8229	4.3439	17	22.8732	0.0003
8	46.1668	3.1495	18	22.8735	0.0000
9	49.3162	2.2097	19	22.8736	0.0000
			20	22.8736	0.0000

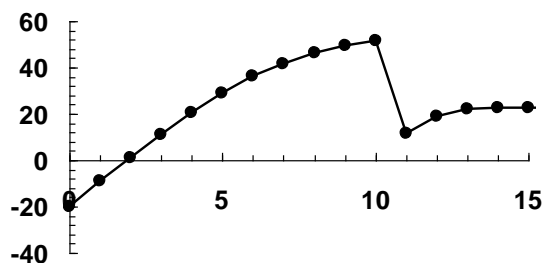

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

**1.8 (a)** The first two steps are


$$c(0.1) = 100 - 0.175(10)0.1 = 98.25 \text{ Bq/L}$$

$$c(0.2) = 98.25 - 0.175(98.25)0.1 = 96.5306 \text{ Bq/L}$$

The process can be continued to yield

$t$	$c$	$dc/dt$
0	100.0000	-17.5000
0.1	98.2500	-17.1938
0.2	96.5306	-16.8929
0.3	94.8413	-16.5972
0.4	93.1816	-16.3068
0.5	91.5509	-16.0214
0.6	89.9488	-15.7410
0.7	88.3747	-15.4656
0.8	86.8281	-15.1949
0.9	85.3086	-14.9290
1	83.8157	-14.6678

**(b)** The results when plotted on a semi-log plot yields a straight line

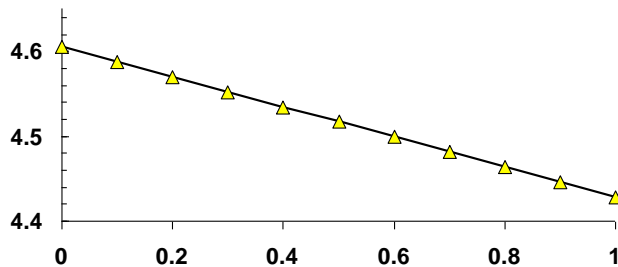

The slope of this line can be estimated as

$$\frac{\ln(83.8157) - \ln(100)}{1} = -0.17655$$

Thus, the slope is approximately equal to the negative of the decay rate. If we had used a smaller step size, the result would be more exact.

**1.9** The first two steps yield


**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

$$y(0.5) = 0 + \left[ 3 \frac{450}{1250} \sin^2(0) - \frac{450}{1250} \right] 0.5 = 0 + (-0.36) 0.5 = -0.18$$

$$y(1) = -0.18 + \left[ 3 \frac{450}{1250} \sin^2(0.5) - \frac{450}{1250} \right] 0.5 = -0.18 + (-0.11176) 0.5 = -0.23508$$

The process can be continued to give the following table and plot:

$t$	$y$	$dy/dt$	$t$	$y$	$dy/dt$
0	0.00000	-0.36000	5.5	1.10271	0.17761
0.5	-0.18000	-0.11176	6	1.19152	-0.27568
1	-0.23588	0.40472	6.5	1.05368	-0.31002
1.5	-0.03352	0.71460	7	0.89866	0.10616
2	0.32378	0.53297	7.5	0.95175	0.59023
2.5	0.59026	0.02682	8	1.24686	0.69714
3	0.60367	-0.33849	8.5	1.59543	0.32859
3.5	0.43443	-0.22711	9	1.75972	-0.17657
4	0.32087	0.25857	9.5	1.67144	-0.35390
4.5	0.45016	0.67201	10	1.49449	-0.04036
5	0.78616	0.63310			

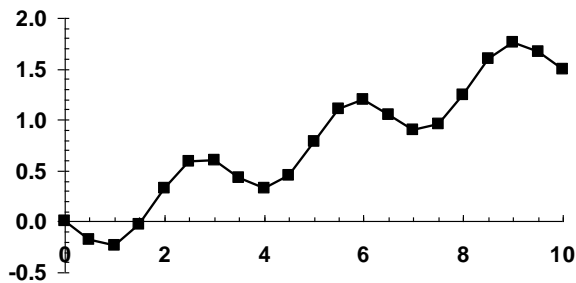

**1.10** The first two steps yield

$$y(0.5) = 0 + \left[ 3 \frac{450}{1250} \sin^2(0) - \frac{150(1+0)^{1.5}}{1250} \right] 0.5 = 0 - 0.12(0.5) = -0.06$$


$$y(1) = -0.06 + \left[ 3 \frac{450}{1250} \sin^2(0.5) - \frac{150(1-0.06)^{1.5}}{1250} \right] 0.5 = -0.06 + 0.13887(0.5) = 0.00944$$

The process can be continued to give

$t$	$y$	$dy/dt$	$t$	$y$	$dy/dt$
0	0.00000	-0.12000	5.5	1.61981	0.02876
0.5	-0.06000	0.13887	6	1.63419	-0.42872

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

1	0.00944	0.64302	6.5	1.41983	-0.40173
1.5	0.33094	0.89034	7	1.21897	0.06951
2	0.77611	0.60892	7.5	1.25372	0.54423
2.5	1.08058	0.02669	8	1.52584	0.57542
3	1.09392	-0.34209	8.5	1.81355	0.12227
3.5	0.92288	-0.18708	9	1.87468	-0.40145
4	0.82934	0.32166	9.5	1.67396	-0.51860
4.5	0.99017	0.69510	10	1.41465	-0.13062
5	1.33772	0.56419			

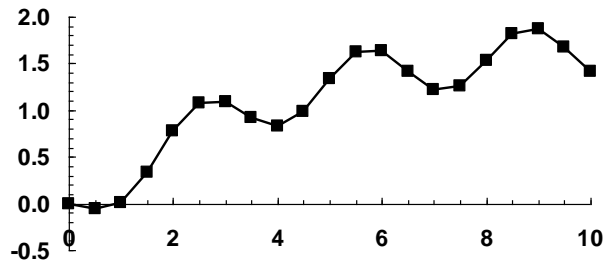

**1.11** When the water level is above the outlet pipe, the volume balance can be written as

$$\frac{dV}{dt} = 3 \sin^2(t) - 3(y - y_{\text{out}})^{1.5}$$

In order to solve this equation, we must relate the volume to the level. To do this, we recognize that the volume of a cone is given by  $V = \pi r^2 y / 3$ . Defining the side slope as  $s = y_{\text{top}} / r_{\text{top}}$ , the radius can be related to the level ( $r = y/s$ ) and the volume can be re-expressed as

$$V = \frac{\pi}{3s^2} y^3$$

which can be solved for

$$y = \sqrt[3]{\frac{3s^2 V}{\pi}} \quad (1)$$

and substituted into the volume balance

$$\frac{dV}{dt} = 3 \sin^2(t) - 3 \left( \sqrt[3]{\frac{3s^2 V}{\pi}} - y_{\text{out}} \right)^{1.5} \quad (2)$$

For the case where the level is below the outlet pipe, outflow is zero and the volume balance simplifies to

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

$$\frac{dV}{dt} = 3 \sin^2(t) \quad (3)$$

These equations can then be used to solve the problem. Using the side slope of  $s = 4/2.5 = 1.6$ , the initial volume can be computed as

$$V(0) = \frac{\pi}{3(1.6)^2} 0.8^3 = 0.20944 \text{ m}^3$$

For the first step,  $y < y_{\text{out}}$  and Eq. (3) gives

$$\frac{dV}{dt}(0) = 3 \sin^2(0) = 0$$

and Euler's method yields

$$V(0.5) = V(0) + \frac{dV}{dt}(0)\Delta t = 0.20944 + 0(0.5) = 0.20944$$

For the second step, Eq. (3) still holds and

$$\frac{dV}{dt}(0.5) = 3 \sin^2(0.5) = 0.689547$$

$$V(1) = V(0.5) + \frac{dV}{dt}(0.5)\Delta t = 0.20944 + 0.689547(0.5) = 0.554213$$

Equation (1) can then be used to compute the new level,

$$y = \sqrt[3]{\frac{3(1.6)^2(0.554213)}{\pi}} = 1.106529 \text{ m}$$


Because this level is now higher than the outlet pipe, Eq. (2) holds for the next step

$$\frac{dV}{dt}(1) = 2.12422 - 3(1.106529 - 1)^{1.5} = 2.019912$$

$$V(1.5) = 0.554213 + 2.019912(0.5) = 1.564169$$

The remainder of the calculation is summarized in the following table and figure.

$t$	$Q_{in}$	$V$	$y$	$Q_{out}$	$dV/dt$
0	0	0.20944	0.8	0	0
0.5	0.689547	0.20944	0.8	0	0.689547
1	2.12422	0.554213	1.106529	0.104309	2.019912
1.5	2.984989	1.564169	1.563742	1.269817	1.715171
2	2.480465	2.421754	1.809036	2.183096	0.29737
2.5	1.074507	2.570439	1.845325	2.331615	-1.25711
3	0.059745	1.941885	1.680654	1.684654	-1.62491
3.5	0.369147	1.12943	1.40289	0.767186	-0.39804
4	1.71825	0.93041	1.31511	0.530657	1.187593
4.5	2.866695	1.524207	1.55031	1.224706	1.641989
5	2.758607	2.345202	1.78977	2.105581	0.653026
5.5	1.493361	2.671715	1.869249	2.431294	-0.93793
6	0.234219	2.202748	1.752772	1.95937	-1.72515
6.5	0.13883	1.340173	1.48522	1.013979	-0.87515
7	1.294894	0.902598	1.301873	0.497574	0.79732
7.5	2.639532	1.301258	1.470703	0.968817	1.670715
8	2.936489	2.136616	1.735052	1.890596	1.045893
8.5	1.912745	2.659563	1.866411	2.419396	-0.50665
9	0.509525	2.406237	1.805164	2.167442	-1.65792
9.5	0.016943	1.577279	1.568098	1.284566	-1.26762
10	0.887877	0.943467	1.321233	0.5462	0.341677

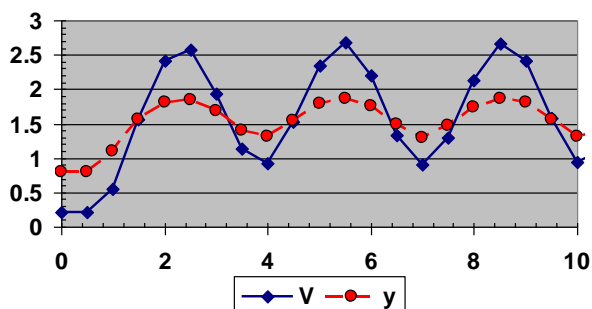

## 1.12

$$Q_{\text{students}} = 35 \text{ ind} \times 80 \frac{\text{J}}{\text{ind s}} \times 20 \text{ min} \times 60 \frac{\text{s}}{\text{min}} \times \frac{\text{kJ}}{1000 \text{ J}} = 3,360 \text{ kJ}$$

$$m = \frac{PVM_{\text{wt}}}{RT} = \frac{(101.325 \text{ kPa})(11\text{m} \times 8\text{m} \times 3\text{m} - 35 \times 0.075 \text{ m}^3)(28.97 \text{ kg/kmol})}{(8.314 \text{ kPa m}^3 / (\text{kmol K}))(20 + 273.15)\text{K}} = 314.796 \text{ kg}$$

$$\Delta T = \frac{Q_{\text{students}}}{mC_v} = \frac{3,360 \text{ kJ}}{(314.796 \text{ kg})(0.718 \text{ kJ}/(\text{kg K}))} = 14.86571 \text{ K}$$

Thus, the rise in temperature during the 20 minutes of the class is 14.86571 K.

Therefore, the final temperature is  $(20 + 273.15) + 14.86571 = 308.01571 \text{ K}$ .

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.



$$1.13 \quad \sum M_{\text{in}} - \sum M_{\text{out}} = 0$$

Food + Drink + Air In + Metabolism = Urine + Skin + Feces + Air Out + Sweat

Drink = Urine + Skin + Feces + Air Out + Sweat – Food – Air In – Metabolism

Drink = 1.4 + 0.35 + 0.2 + 0.4 + 0.3 – 1 – 0.05 – 0.3 = 1.3 L

**1.14 (a)** The force balance can be written as:

$$m \frac{dv}{dt} = -mg(0) \frac{R^2}{(R+x)^2} + c_d v |v|$$

Dividing by mass gives

$$\frac{dv}{dt} = -g(0) \frac{R^2}{(R+x)^2} + \frac{c_d}{m} v |v|$$

**(b)** Recognizing that  $dx/dt = v$ , the chain rule is

$$\frac{dv}{dt} = v \frac{dv}{dx}$$

Setting drag to zero and substituting this relationship into the force balance gives

$$\frac{dv}{dx} = -\frac{g(0)}{v} \frac{R^2}{(R+x)^2}$$

**(c)** Using separation of variables

$$v \, dv = -g(0) \frac{R^2}{(R+x)^2} \, dx$$

Integrating gives

$$\frac{v^2}{2} = g(0) \frac{R^2}{R+x} + C$$

Applying the initial condition yields

$$\frac{v_0^2}{2} = g(0) \frac{R^2}{R+0} + C$$

which can be solved for  $C = v_0^2/2 - g(0)R$ , which can be substituted back into the solution to give

$$\frac{v^2}{2} = g(0) \frac{R^2}{R+x} + \frac{v_0^2}{2} - g(0)R$$

or

$$v = \pm \sqrt{v_0^2 + 2g(0) \frac{R^2}{R+x} - 2g(0)R}$$

Note that the plus sign holds when the object is moving upwards and the minus sign holds when it is falling.

(d) Euler's method can be developed as

$$v(x_{i+1}) = v(x_i) + \left[ -\frac{g(0)}{v(x_i)} \frac{R^2}{(R+x_i)^2} \right] (x_{i+1} - x_i)$$

The first step can be computed as

$$v(10,000) = 1,500 + \left[ -\frac{9.81}{1,500} \frac{(6.37 \times 10^6)^2}{(6.37 \times 10^6 + 0)^2} \right] (10,000 - 0) = 1,500 + (-0.00654)10,000 = 1434.600$$

The remainder of the calculations can be implemented in a similar fashion as in the following table

$x$	$v$	$dv/dx$	$v$ -analytical
0	1500.000	-0.00654	1500.000
10000	1434.600	-0.00682	1433.216
20000	1366.433	-0.00713	1363.388
30000	1295.089	-0.00750	1290.023
40000	1220.050	-0.00794	1212.476
50000	1140.644	-0.00847	1129.885
60000	1055.974	-0.00912	1041.050
70000	964.800	-0.00995	944.208


**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

80000	865.319	-0.01106	836.581
90000	754.745	-0.01264	713.303
100000	628.364	-0.01513	564.203

For the analytical solution, the value at 10,000 m can be computed as

$$v = \sqrt{1,500^2 + 2(9.81) \frac{(6.37 \times 10^6)^2}{(6.37 \times 10^6 + 10,000)} - 2(9.81)(6.37 \times 10^6)} = 1433.216$$

The remainder of the analytical values can be implemented in a similar fashion as in the last column of the above table. The numerical and analytical solutions can be displayed graphically.

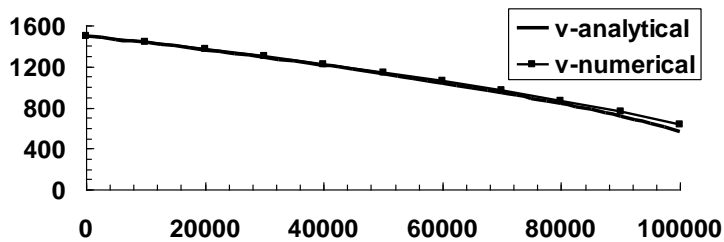

**1.15** The volume of the droplet is related to the radius as

$$V = \frac{4\pi r^3}{3} \quad (1)$$

This equation can be solved for radius as

$$r = \sqrt[3]{\frac{3V}{4\pi}} \quad (2)$$

The surface area is

$$A = 4\pi r^2 \quad (3)$$

Equation (2) can be substituted into Eq. (3) to express area as a function of volume

$$A = 4\pi \left( \frac{3V}{4\pi} \right)^{2/3}$$

This result can then be substituted into the original differential equation,

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

$$\frac{dV}{dt} = -k4\pi \left( \frac{3V}{4\pi} \right)^{2/3} \quad (4)$$


The initial volume can be computed with Eq. (1),

$$V = \frac{4\pi r^3}{3} = \frac{4\pi(2.5)^3}{3} = 65.44985 \text{ mm}^3$$

Euler's method can be used to integrate Eq. (4). Here are the beginning and last steps

$t$	$V$	$dV/dt$
0	65.44985	-6.28319
0.25	63.87905	-6.18225
0.5	62.33349	-6.08212
0.75	60.81296	-5.98281
1	59.31726	-5.8843
⋮		
9	23.35079	-3.16064
9.25	22.56063	-3.08893
9.5	21.7884	-3.01804
9.75	21.03389	-2.94795
10	20.2969	-2.87868

A plot of the results is shown below. We have included the radius on this plot (dashed line and right scale):

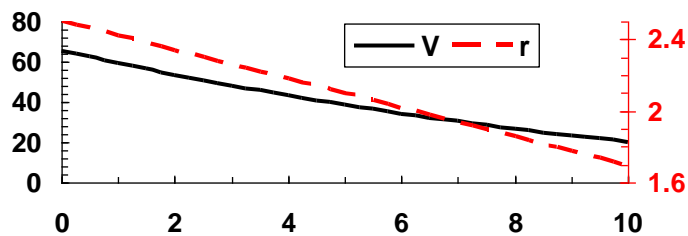

Eq. (2) can be used to compute the final radius as

$$r = \sqrt[3]{\frac{3(20.2969)}{4\pi}} = 1.692182$$

Therefore, the average evaporation rate can be computed as

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

$$k = \frac{(2.5 - 1.692182) \text{ mm}}{10 \text{ min}} = 0.080782 \frac{\text{mm}}{\text{min}}$$

which is approximately equal to the given evaporation rate of 0.08 mm/min.

**1.16** Continuity at the nodes can be used to determine the flows as follows:

$$Q_1 = Q_2 + Q_3 = 0.7 + 0.5 = 1.2 \text{ m}^3/\text{s}$$

$$Q_{10} = Q_1 = 1.2 \text{ m}^3/\text{s}$$


$$Q_9 = Q_{10} - Q_2 = 1.2 - 0.7 = 0.5 \text{ m}^3/\text{s}$$

$$Q_4 = Q_9 - Q_8 = 0.5 - 0.3 = 0.2 \text{ m}^3/\text{s}$$

$$Q_5 = Q_3 - Q_4 = 0.5 - 0.2 = 0.3 \text{ m}^3/\text{s}$$

$$Q_6 = Q_5 - Q_7 = 0.3 - 0.1 = 0.2 \text{ m}^3/\text{s}$$

Therefore, the final results are

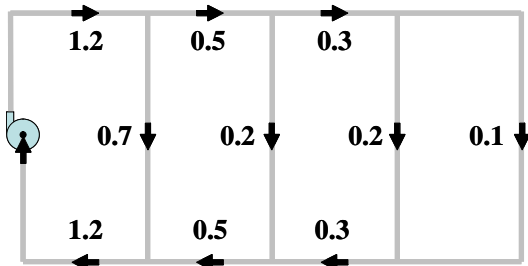

**1.17** The first two steps can be computed as


$$T(1) = 70 + [-0.019(70 - 20)] 2 = 68 + (-0.95)2 = 68.1$$

$$T(2) = 68.1 + [-0.019(68.1 - 20)] 2 = 68.1 + (-0.9139)2 = 66.2722$$

The remaining results are displayed below along with a plot of the results.

$t$	$T$	$dT/dt$	$t$	$T$	$dT/dt$
0	70.00000	-0.95000	12.00000	59.62967	-0.75296
2	68.10000	-0.91390	14.00000	58.12374	-0.72435
4	66.27220	-0.87917	16.00000	56.67504	-0.69683
6	64.51386	-0.84576	18.00000	55.28139	-0.67035
8	62.82233	-0.81362	20.00000	53.94069	-0.64487
10	61.19508	-0.78271			

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

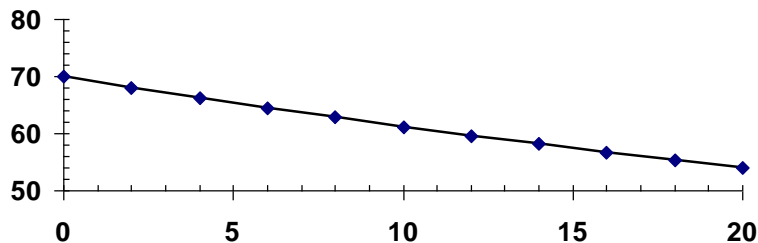

**1.18 (a)** For the constant temperature case, Newton's law of cooling is written as

$$\frac{dT}{dt} = -0.12(T - 10)$$

The first two steps of Euler's methods are

$$T(0.5) = T(0) - \frac{dT}{dt}(0) \times \Delta t = 37 + 0.12(10 - 37)(0.5) = 37 - 3.2400 \times 0.50 = 35.3800$$

$$T(1) = 35.3800 + 0.12(10 - 35.3800)(0.5) = 35.3800 - 3.0456 \times 0.50 = 33.8572$$

The remaining calculations are summarized in the following table:

$t$	$T_a$	$T$	$dT/dt$
0:00	10	37.0000	-3.2400
0:30	10	35.3800	-3.0456
1:00	10	33.8572	-2.8629
1:30	10	32.4258	-2.6911
2:00	10	31.0802	-2.5296
2:30	10	29.8154	-2.3778
3:00	10	28.6265	-2.2352
3:30	10	27.5089	-2.1011
4:00	10	26.4584	-1.9750
4:30	10	25.4709	-1.8565
5:00	10	24.5426	-1.7451

**(b)** For this case, the room temperature can be represented as

$$T_a = 20 - 2t$$

where  $t = \text{time (hrs)}$ . Newton's law of cooling is written as

$$\frac{dT}{dt} = -0.12(T - 20 + 2t)$$

The first two steps of Euler's methods are

$$T(0.5) = 37 + 0.12(20 - 37)(0.5) = 37 - 2.040 \times 0.50 = 35.9800$$


$$T(1) = 35.9800 + 0.12(19 - 35.9800)(0.5) = 35.9800 - 2.0376 \times 0.50 = 34.9612$$

The remaining calculations are summarized in the following table:

$t$	$T_a$	$T$	$dT/dt$
0:00	20	37.0000	-2.0400
0:30	19	35.9800	-2.0376
1:00	18	34.9612	-2.0353
1:30	17	33.9435	-2.0332
2:00	16	32.9269	-2.0312
2:30	15	31.9113	-2.0294
3:00	14	30.8966	-2.0276
3:30	13	29.8828	-2.0259
4:00	12	28.8699	-2.0244
4:30	11	27.8577	-2.0229
5:00	10	26.8462	-2.0215

Comparison with (a) indicates that the effect of the room air temperature has a significant effect on the expected temperature at the end of the 5-hr period (difference =  $26.8462 - 24.5426 = 2.3036^\circ\text{C}$ ).

(c) The solutions for (a) Constant  $T_a$ , and (b) Cooling  $T_a$  are plotted below:

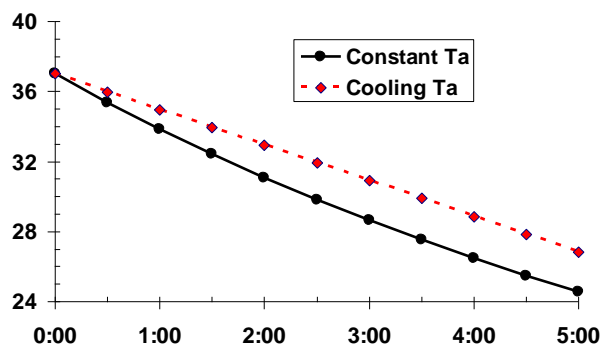

1.19 The two equations to be solved are

$$\frac{dv}{dt} = g - \frac{c_d}{m} v^2$$

$$\frac{dx}{dt} = v$$

Euler's method can be applied for the first step as

$$v(2) = v(0) + \frac{dv}{dt}(0)\Delta t = 0 + \left(9.81 - \frac{0.25}{68.1}(0)^2\right)(2) = 19.6200$$

$$x(2) = x(0) + \frac{dx}{dt}(0)\Delta t = 0 + 0(2) = 0$$


For the second step:

$$v(4) = v(2) + \frac{dv}{dt}(2)\Delta t = 19.6200 + \left(9.81 - \frac{0.25}{68.1}(19.6200)^2\right)(2) = 19.6200 + 8.3968(2) = 36.4137$$

$$x(4) = x(2) + \frac{dx}{dt}(2)\Delta t = 0 + 19.6200(2) = 39.2400$$

The remaining steps can be computed in a similar fashion as tabulated and plotted below:

$t$	$x$	$v$	$dx/dt$	$dv/dt$
0	0.0000	0.0000	0.0000	9.8100
2	0.0000	19.6200	19.6200	8.3968
4	39.2400	36.4137	36.4137	4.9423
6	112.0674	46.2983	46.2983	1.9409
8	204.6640	50.1802	50.1802	0.5661
10	305.0244	51.3123	51.3123	0.1442

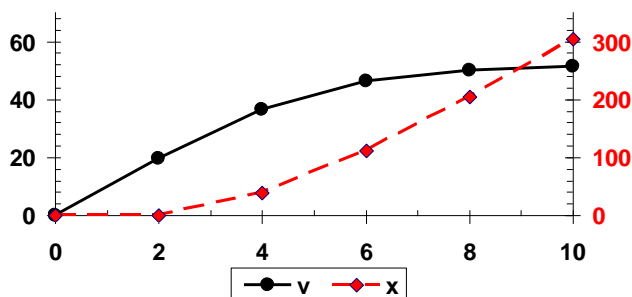

**1.20 (a)** The force balance with buoyancy can be written as

$$m \frac{dv}{dt} = mg - \frac{1}{2} \rho v |v| A C_d - \rho V g$$

Divide both sides by mass,

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.



$$\frac{dv}{dt} = g \left( 1 - \frac{\rho V}{m} \right) - \frac{\rho A C_d}{2m} v |v|$$

(b) For a sphere, the mass is related to the volume as in  $m = \rho_s V$  where  $\rho_s$  = the sphere's density ( $\text{kg/m}^3$ ). Substituting this relationship gives

$$\frac{dv}{dt} = g \left( 1 - \frac{\rho}{\rho_s} \right) - \frac{\rho A C_d}{2\rho_s V} v |v|$$

The formulas for the volume and projected area can be substituted to give

$$\frac{dv}{dt} = g \left( 1 - \frac{\rho}{\rho_s} \right) - \frac{3\rho C_d}{4\rho_s d} v |v|$$

(c) At steady state ( $dv/dt = 0$ ),

$$g \left( \frac{\rho_s - \rho}{\rho_s} \right) = \frac{3\rho C_d}{4\rho_s d} v^2$$

which can be solved for the terminal velocity

$$v = \sqrt{\frac{4gd}{3C_d} \left( \frac{\rho_s - \rho}{\rho} \right)}$$

Substituting the values, the terminal velocity is found to be,

$$v = \sqrt{\frac{4 \times 9.8 \times 0.01}{3 \times 0.47} \left( \frac{2700 - 1000}{1000} \right)} = 0.68783 \frac{\text{m}}{\text{s}}$$

(d) Before implementing Euler's method, the parameters can be substituted into the differential equation to give

$$\frac{dv}{dt} = 9.81 \left( 1 - \frac{1000}{2700} \right) - \frac{3(1000)0.47}{4(2700)(0.01)} v^2 = 6.176667 - 13.055556 v^2$$


The first two steps for Euler's method are

$$v(0.03125) = 0 + (6.176667 - 13.055556(0)^2)0.03125 = 0.193021$$

$$v(0.0625) = 0.193021 + (6.176667 - 13.055556(0.193021)^2)0.03125 = 0.370841$$

The remaining steps can be computed in a similar fashion as tabulated and plotted below:

$t$	$v$	$dv/dt$
0	0.000000	6.176667
0.03125	0.193021	5.690255
0.0625	0.370841	4.381224
0.09375	0.507755	2.810753
0.125	0.595591	1.545494
0.15625	0.643887	0.763953
0.1875	0.667761	0.355136
0.21875	0.678859	0.160023
0.25	0.683860	0.071055

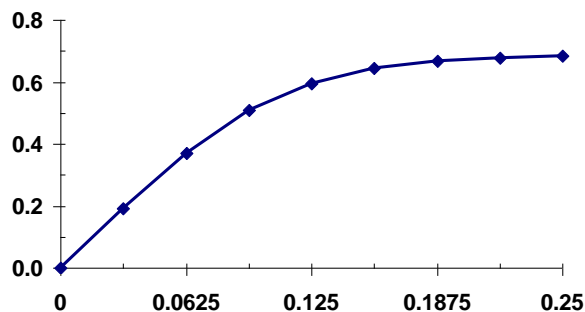

**1.21 (a)** The force balance can be written as

$$m \frac{dv}{dt} = mg - \frac{1}{2} \rho v |v| A C_d$$

Dividing by mass gives

$$\frac{dv}{dt} = g - \frac{\rho A C_d}{2m} v |v| \quad (1)$$

The mass of the sphere is  $\rho_s V$  where  $V = \text{volume (m}^3\text{)}$ . The projected area and volume of a sphere are  $\pi d^2/4$  and  $\pi d^3/6$ , respectively. Substituting these relationships gives

$$\frac{dv}{dt} = g - \frac{3\rho C_d}{4d\rho_s} v|v|$$

$$\frac{dx}{dt} = v$$

(b) The first step for Euler's method is

$$\frac{dv}{dt} = 9.81 - \frac{3(1.3)0.47}{4(1.2)2700} (-40)|-40| = 10.0363$$

$$\frac{dx}{dt} = -40$$


$$v = -40 + 10.0363(2) = -19.9274$$


$$x = 100 - 40(2) = 20$$

The remaining steps are shown in the following table:

$t$	$x$	$v$	$dx/dt$	$dv/dt$
0	100.0000	-40.0000	-40.0000	10.0363
2	20.0000	-19.9274	-19.9274	9.8662
4	-19.8548	-0.1951	-0.1951	9.8100
6	-20.2450	19.4249	19.4249	9.7566
8	18.6049	38.9382	38.9382	9.5956
10	96.4813	58.1293	58.1293	9.3321
12	212.7399	76.7935	76.7935	8.9759
14	366.3269	94.7453	94.7453	8.5404

(c) The results can be graphed as (notice that we have reversed the axis for the distance,  $x$ , so that the negative elevations are upwards).

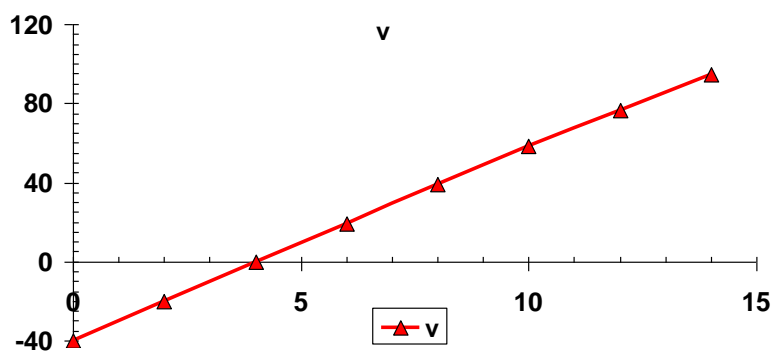

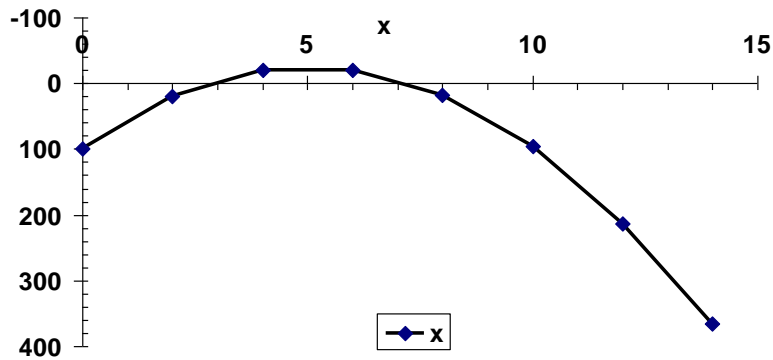

(d) Inspecting the differential equation for velocity (Eq. 1) indicates that the bulk drag coefficient is

$$c' = \frac{\rho A C_d}{2}$$

Therefore, for this case, because  $A = \pi(1.2)^2/4 = 1.131 \text{ m}^2$ , the bulk drag coefficient is

$$c' = \frac{1.3(1.131)0.47}{2} = 0.3455 \frac{\text{kg}}{\text{m}}$$

**1.22 (a)** A force balance on a sphere can be written as:

$$m \frac{dv}{dt} = F_{\text{gravity}} - F_{\text{buoyancy}} - F_{\text{drag}}$$

where

$$F_{\text{gravity}} = mg$$

$$F_{\text{buoyancy}} = \rho V g$$

$$F_{\text{drag}} = 3\pi\mu dv$$

Substituting the individual terms into the force balance yields

$$m \frac{dv}{dt} = mg - \rho V g - 3\pi\mu dv$$

Divide by  $m$

$$\frac{dv}{dt} = g - \frac{\rho V g}{m} - \frac{3\pi\mu dv}{m}$$

Note that  $m = \rho_s V$ , so

$$\frac{dv}{dt} = g - \frac{\rho g}{\rho_s} - \frac{3\pi\mu dv}{\rho_s V}$$

The volume can be represented in terms of more fundamental quantities as  $V = \pi d^3/6$ . Substituting this relationship into the differential equation gives the final differential equation

$$\frac{dv}{dt} = g \left( 1 - \frac{\rho}{\rho_s} \right) - \frac{18\mu}{\rho_s d^2} v$$

(b) At steady-state, the equation is

$$0 = g \left( 1 - \frac{\rho}{\rho_s} \right) - \frac{18\mu}{\rho_s d^2} v$$

which can be solved for the terminal velocity

$$v_\infty = \frac{g}{18} \frac{\rho_s - \rho}{\mu} d^2$$

This equation is sometimes called *Stokes Settling Law*.

(c) Before computing the result, it is important to convert all the parameters into consistent units. For the present problem, the necessary conversions are

$$d = 10 \mu\text{m} \times \frac{\text{m}}{10^6 \mu\text{m}} = 10^{-5} \text{m} \qquad \rho = 1 \frac{\text{g}}{\text{cm}^3} \times \frac{10^6 \text{cm}^3}{\text{m}^3} \times \frac{\text{g}}{10^3 \text{kg}} = 1000 \frac{\text{kg}}{\text{m}^3}$$

$$\rho_s = 2.65 \frac{\text{g}}{\text{cm}^3} \times \frac{10^6 \text{cm}^3}{\text{m}^3} \times \frac{\text{g}}{10^3 \text{kg}} = 2650 \frac{\text{kg}}{\text{m}^3} \qquad \mu = 0.014 \frac{\text{g}}{\text{cm s}} \times \frac{100 \text{cm}}{\text{m}} \times \frac{\text{kg}}{1000 \text{g}} = 0.0014 \frac{\text{kg}}{\text{m s}}$$

The terminal velocity can then computed as

$$v_\infty = \frac{9.81}{18} \frac{2650 - 1000}{0.0014} (1 \times 10^{-5})^2 = 6.42321 \times 10^{-5} \frac{\text{m}}{\text{s}}$$

(d) The Reynolds number can be computed as

$$\text{Re} = \frac{\rho dv}{\mu} = \frac{1000(10^{-5})6.42321 \times 10^{-5}}{0.0014} = 0.0004588$$

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

This is far below 1, so the flow is very laminar.

(e) Before implementing Euler's method, the parameters can be substituted into the differential equation to give

$$\frac{dv}{dt} = 9.81 \left( 1 - \frac{1000}{2650} \right) - \frac{18(0.0014)}{2650(0.00001)^2} v = 6.108113 - 95,094v$$

The first two steps for Euler's method are

$$v(3.8147 \times 10^{-6}) = 0 + (6.108113 - 95,094(0)) \times 3.8147 \times 10^{-6} = 2.33006 \times 10^{-5}$$

$$v(7.6294 \times 10^{-6}) = 2.33006 \times 10^{-5} + (6.108113 - 95,094(2.33006 \times 10^{-5})) \times 3.8147 \times 10^{-6} = 3.81488 \times 10^{-5}$$

The remaining steps can be computed in a similar fashion as tabulated and plotted below:

$t$	$v$	$dv/dt$	$t$	$v$	$dv/dt$
0	0	6.108113	$2.29 \times 10^{-5}$	5.99E-05	0.409017
$3.81 \times 10^{-6}$	2.33E-05	3.892358	$2.67 \times 10^{-5}$	6.15E-05	0.260643
$7.63 \times 10^{-6}$	3.81E-05	2.480381	$3.05 \times 10^{-5}$	6.25E-05	0.166093
$1.14 \times 10^{-5}$	4.76E-05	1.580608	$3.43 \times 10^{-5}$	6.31E-05	0.105842
$1.53 \times 10^{-5}$	5.36E-05	1.007233	$3.81 \times 10^{-5}$	6.35E-05	0.067447
$1.91 \times 10^{-5}$	5.75E-05	0.641853			

**1.23** Substituting the parameters into the differential equation gives

$$\begin{aligned} \frac{dy}{dx} &= \frac{10000}{24(2 \times 10^{11})0.000325} (4x^3 - 12(4)x^2 + 12(4)^2 x) \\ &= 2.5641 \times 10^{-5} (x^3 - 12x^2 + 48x) \end{aligned}$$

The first step of Euler's method is


$$\begin{aligned} \frac{dy}{dx} &= 2.5641 \times 10^{-5} [(0)^3 - 12(0)^2 + 48(0)] = 0 \\ y(0.125) &= 0 + 0(0.125) = 0 \end{aligned}$$

The second step is

$$\begin{aligned} \frac{dy}{dx} &= 2.5641 \times 10^{-5} [(0.125)^3 - 12(0.125)^2 + 48(0.125)] = 0.000149 \\ y(0.25) &= 0 + 0.000149(0.125) = 1.86361 \times 10^{-5} \end{aligned}$$

The remainder of the calculations along with the analytical solution are summarized in the following table and plot. Note that the results of the numerical and analytical solutions are close.

$x$	$y$ -Euler	$dy/dx$	$y$ -analytical	$x$	$y$ -Euler	$dy/dx$	$y$ -analytical
0	0	0	0	2.125	0.001832	0.001472	0.001925
0.125	0	0.000149	9.42E-06	2.25	0.002016	0.001504	0.002111
0.25	1.86E-05	0.000289	3.69E-05	2.375	0.002204	0.001531	0.002301
0.375	5.47E-05	0.00042	8.13E-05	2.5	0.002395	0.001554	0.002494
0.5	0.000107	0.000542	0.000141	2.625	0.00259	0.001574	0.00269
0.625	0.000175	0.000655	0.000216	2.75	0.002787	0.001591	0.002887
0.75	0.000257	0.000761	0.000305	2.875	0.002985	0.001605	0.003087
0.875	0.000352	0.000859	0.000406	3	0.003186	0.001615	0.003288
1	0.000459	0.000949	0.000519	3.125	0.003388	0.001624	0.003491
1.125	0.000578	0.001032	0.000643	3.25	0.003591	0.00163	0.003694
1.25	0.000707	0.001108	0.000777	3.375	0.003795	0.001635	0.003898
1.375	0.000845	0.001177	0.00092	3.5	0.003999	0.001638	0.004103
1.5	0.000992	0.00124	0.001071	3.625	0.004204	0.00164	0.004308
1.625	0.001147	0.001298	0.00123	3.75	0.004409	0.001641	0.004513
1.75	0.00131	0.001349	0.001395	3.875	0.004614	0.001641	0.004718
1.875	0.001478	0.001395	0.001567	4	0.004819	0.001641	0.004923
2	0.001653	0.001436	0.001744				

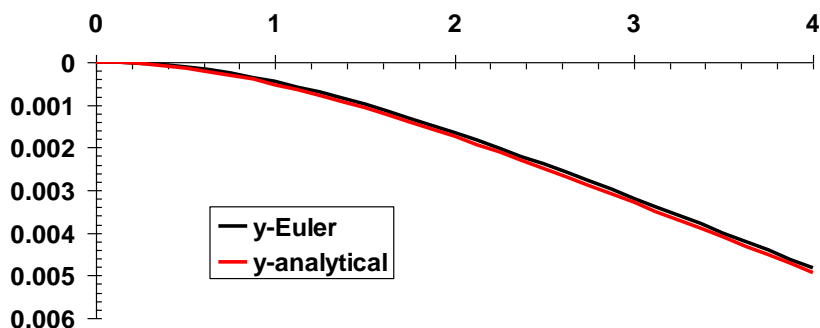

**1.24** [Note that students can easily get the underlying equations for this problem off the web]. The volume of a sphere can be calculated as

$$V_s = \frac{4}{3}\pi r^3$$

The portion of the sphere above water (the “cap”) can be computed as

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

$$V_a = \frac{\pi h^2}{3}(3r - h)$$

Therefore, the volume below water is

$$V_s = \frac{4}{3}\pi r^3 - \frac{\pi h^2}{3}(3r - h)$$

Thus, the steady-state force balance can be written as

$$\rho_s g \frac{4}{3}\pi r^3 - \rho_f g \left[ \frac{4}{3}\pi r^3 - \frac{\pi h^2}{3}(3r - h) \right] = 0$$

Cancelling common terms gives

$$\rho_s \frac{4}{3}r^3 - \rho_f \left[ \frac{4}{3}r^3 - \frac{h^2}{3}(3r - h) \right] = 0$$

Collecting terms yields

$$\frac{\rho_f}{3}h^3 - r\rho_f h^2 - (\rho_s - \rho_f)\frac{4}{3}r^3 = 0$$

**1.25** [Note that students can easily get the underlying equations for this problem off the web]. The total volume of a right circular cone can be calculated as

$$V_t = \frac{1}{3}\pi r_2^2 H$$

The volume of the frustum below the earth's surface can be computed as

$$V_b = \frac{\pi(H-h_1)}{3}(r_1^2 + r_2^2 + r_1 r_2)$$

Archimedes' principle says that, at steady state, the downward force of the whole cone must be balanced by the upward buoyancy force of the below ground frustum,

$$\frac{1}{3}\pi r_2^2 H g \rho_s = \frac{\pi(H-h_1)}{3}(r_1^2 + r_2^2 + r_1 r_2) g \rho_b \quad (1)$$

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.



Before proceeding we have too many unknowns:  $r_1$  and  $h_1$ . So before solving, we must eliminate  $r_1$  by recognizing that using similar triangles ( $r_1/h_1 = r_2/H$ )

$$r_1 = \frac{r_2}{H} h_1$$

which can be substituted into Eq. (1) (and cancelling the  $g$ 's)

$$\frac{1}{3} \pi r_2^2 H \rho_g = \frac{\pi(H-h_1)}{3} \left( \left( \frac{r_2}{H} h_1 \right)^2 + r_2^2 + \frac{r_2^2}{H} h_1 \right) \rho_b$$

Therefore, the equation now has only 1 unknown:  $h_1$ , and the steady-state force balance can be written as

$$\frac{1}{3} \pi r_2^2 H \rho_g - \frac{\pi(H-h_1)}{3} \left( \left( \frac{r_2}{H} h_1 \right)^2 + r_2^2 + \frac{r_2^2}{H} h_1 \right) \rho_b = 0$$

Cancelling common terms gives

$$\frac{1}{3} r_2^2 H \rho_g - \frac{(H-h_1)}{3} \left( \left( \frac{r_2}{H} h_1 \right)^2 + r_2^2 + \frac{r_2^2}{H} h_1 \right) \rho_b = 0$$

and collecting terms yields

$$\frac{1}{3} r_2^2 \left( H \rho_g - \frac{(H-h_1)}{3} \rho_b \right) - \frac{(H-h_1)}{3} \left( \frac{r_2^2}{H} h_1 \right) \left( \frac{h_1}{H} + 1 \right) \rho_b = 0$$

**1.26 (a)** The pair of differential equations to be solved are

$$\frac{di}{dt} = -\frac{R}{L} i - \frac{q}{LC}$$

$$\frac{dq}{dt} = i$$

At  $t = 0$ ,

$$\frac{di}{dt} = -\frac{200}{5} i - \frac{1}{5(10^{-4})} = -40i - 2000 = -2000$$

$$\frac{dq}{dt} = i = 0$$

$$i = 0 - 2000(0.01) = -20$$

$$q = 1 + 0(0.01) = 1$$

At  $t = 0.01$


$$i = -20 + (-40(-20) - 2000)0.01 = -20 - 1200(0.01) = -32$$

$$q = 1 - 20(0.01) = 0.8$$

The calculation can be continued to give

$t$	$i$	$q$	$di/dt$	$dq/dt$
0	0	1	-2000	0
0.01	-20	1	-1200	-20
0.02	-32	0.8	-320	-32
0.03	-35.2	0.48	448	-35.2
0.04	-30.72	0.128	972.8	-30.72
0.05	-20.992	-0.1792	1198.08	-20.992
0.06	-9.0112	-0.38912	1138.688	-9.0112
0.07	2.37568	-0.47923	863.4328	2.37568
0.08	11.01001	-0.45547	470.5396	11.01005
0.09	15.71553	-0.34537	62.1236	15.71541
0.1	16.33665	-0.18822	-277.026	16.33665

(b)

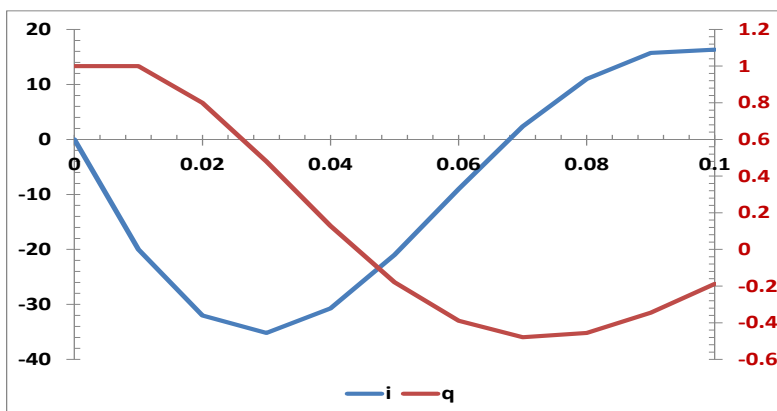

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

**1.27 (a)**

$$\frac{dv_x}{dt} = -\frac{c}{m}v_x \quad \frac{dv_y}{dt} = g - \frac{c}{m}v_y \quad \frac{dx}{dt} = v_x \quad \frac{dy}{dt} = v_y$$

**(b)** Substituting the parameters

$$\begin{aligned} \frac{dv_x}{dt} &= -0.178571v_x & \frac{dv_y}{dt} &= 9.81 - 0.178571v_y \\ \frac{dx}{dt} &= v_x & \frac{dy}{dt} &= v_y \end{aligned}$$

First step:

$$v_x = 180 - 0.178571(150)(1) = 180 - 32.1429(1) = 147.8571$$

$$\frac{dv_y}{dt} = 9.81 - \frac{12.5}{70}v_y = 9.81 - \frac{12.5}{70}(0) = 9.81$$

$$v_y = 0 + 9.81(1) = 9.81$$


$$x = 0 + 180(1) = 180$$

$$y = 0 + 0(1) = 0$$

The calculation can be continued to give

$t$	$v_x$	$v_y$	$x$	$y$	$dv_x$	$dv_y$	$dx$	$dy$
0	180	0	0	0	-32.1429	9.81	180	0
1	147.8571	9.81	180	0	-26.4031	8.058214	147.8571	9.81
2	121.4541	17.86821	327.8571	9.81	-21.6882	6.619247	121.4541	17.86821
3	99.76585	24.48746	449.3112	27.67821	-17.8153	5.437239	99.76585	24.48746
4	81.95052	29.9247	549.0771	52.16568	-14.634	4.466303	81.95052	29.9247
5	67.3165	34.391	631.0276	82.09038	-12.0208	3.668749	67.3165	34.391
6	55.2957	38.05975	698.3441	116.4814	-9.87423	3.013615	55.2957	38.05975
7	45.42147	41.07337	753.6398	154.5411	-8.11098	2.47547	45.42147	41.07337
8	37.31049	43.54884	799.0613	195.6145	-6.66259	2.033422	37.31049	43.54884
9	30.6479	45.58226	836.3718	239.1633	-5.47284	1.670311	30.6479	45.58226
10	25.17506	47.25257	867.0197	284.7456	-4.49555	1.372041	25.17506	47.25257

(c)

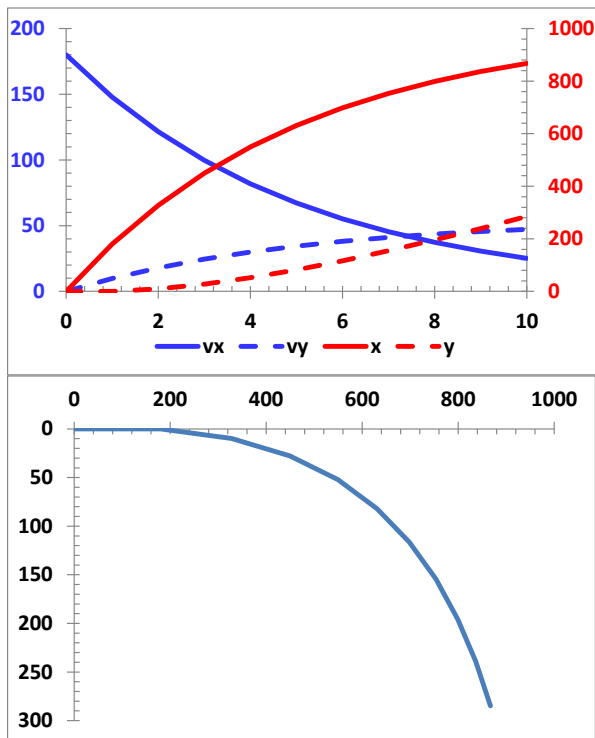

Inspecting these figures and the numerical results indicates that the individual would hit the ground a little over 8 seconds in the chute did not open.

1.28 (a)

$$m = m_p + m_G = m_p + \frac{\pi d_b^3}{6} \frac{P}{RT_a}$$

$$m \frac{dv}{dt} = F_B - F_G - F_P - F_D = V_b \rho_a g - V_b \rho_g g - m_p g - \frac{1}{2} \rho_a A_b C_d v^2 \quad (1)$$

$$m \frac{dv}{dt} = F_B - F_G - F_P - F_D = \frac{\pi d_b^3}{6} \rho_a g - \frac{\pi d_b^3}{6} \frac{P}{RT_a} g - m_p g - \frac{1}{2} \rho_a \frac{\pi d_b^2}{4} C_d v^2$$

(Note: Only the balloon's volume is used to calculate the buoyant force since it is much larger than the payload volume.)

$$\frac{dv}{dt} = \frac{\pi d_b^3}{6m} \rho_a g - \frac{\pi d_b^3}{6m} \frac{P}{RT_a} g - \frac{m_p}{m} g - \frac{1}{8} \rho_a \frac{\pi d_b^2}{m} C_d v^2$$

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

$$\frac{dv}{dt} = \frac{\pi d_b^3}{6 \left( m_p + \frac{\pi d_b^3 P}{6 RT_a} \right)} \rho_a g - \frac{\pi d_b^3}{6 \left( m_p + \frac{\pi d_b^3 P}{6 RT_a} \right)} \frac{P}{RT_a} g - \frac{m_p}{m} g - \frac{1}{8} \rho_a \frac{\pi d_b^2}{m} C_d v^2$$

$$\frac{dv}{dt} = \left[ \frac{\pi d_b^3}{6 \left( m_p + \frac{\pi d_b^3 P}{6 RT_a} \right)} \rho_a - \frac{\pi d_b^3}{6 \left( m_p + \frac{\pi d_b^3 P}{6 RT_a} \right)} \frac{P}{RT_a} - \frac{m_p}{m} \right] g - \frac{1}{8} \rho_a \frac{\pi d_b^2}{m} C_d v^2$$

$$\frac{dv}{dt} = \left[ \frac{\pi d_b^3}{6 \left( m_p + \frac{\pi d_b^3 P}{6 RT_a} \right)} \left[ \rho_a - \frac{P}{RT_a} \right] - \frac{m_p}{m} \right] g - \frac{1}{8} \rho_a \frac{\pi d_b^2}{m_p + \frac{\pi d_b^3 P}{6 RT_a}} C_d v^2$$

(b) Using Eq. (1) at steady state

$$0 = F_B - F_G - F_P - F_D = V_b \rho_a g - V_b \rho_g g - m_p g - \frac{1}{2} \rho_a A_b C_d v^2$$

$$v = \sqrt{\frac{V_b \rho_a g - V_b \rho_g g - m_p g}{\frac{1}{2} \rho_a A_b C_d}} = \sqrt{\frac{2711(1.2)9.81 - 2711(0.9459)9.81 - 265(9.81)}{\frac{1}{2}(1.2)235(0.47)}} = \sqrt{\frac{4158.117}{66.27}} = 7.92118 \frac{\text{m}}{\text{s}}$$

(c)


Cd	0.47			P	101300	Pa		Volume	2711
M <sub>p</sub>	265	kg		R	287	J/kg.K		Area	235
d	17.3	m		T	373	K			
g	9.81			rho_a	1.2	kg/m <sup>3</sup>			
mg	2564.3349	N		rho_g	0.9459	kg/m <sup>3</sup>			
<b>vterm</b>	<b>7.92118</b>	m/s							
			Total	2829.3349					
			mass						
FB	31914.44		FG	25166.61					
Fp	2599.65								

<b>t</b>	<b>v</b>	<b>dv/dt</b>
0	0	1.466133

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.

2	2.932265	1.264689
4	5.461643	0.767267
6	6.996178	0.319383
8	7.634944	0.100422
10	7.835789	0.027624
12	7.891038	0.007268
14	7.905573	0.001888
16	7.909349	0.000489
18	7.910327	0.000127
20	7.91058	0.000033
22	7.910646	0.000008
24	7.910663	0.000002
26	7.910667	0.000001
28	7.910668	0
30	7.910669	0
.	.	.
.	.	.
.	.	.
56	7.910669	0
58	7.910669	0
60	7.910669	0

The values can be plotted as

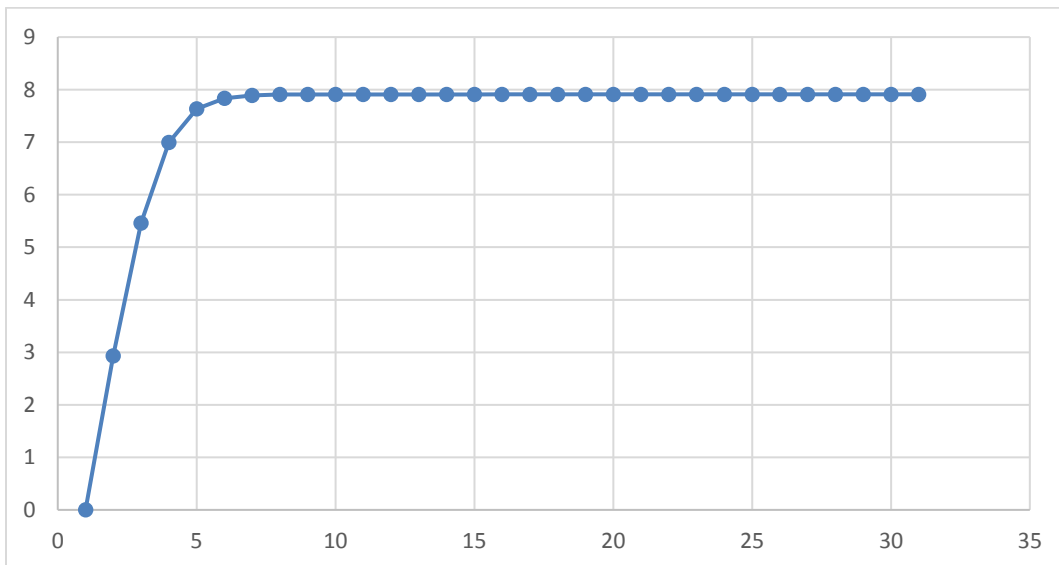

**PROPRIETARY MATERIAL.** © The McGraw-Hill Companies, Inc. All rights reserved. No part of this Manual may be displayed, reproduced or distributed in any form or by any means, without the prior written permission of the publisher, or used beyond the limited distribution to teachers and educators permitted by McGraw-Hill for their individual course preparation. If you are a student using this Manual, you are using it without permission.